

ASIASAT 6 120°E

Next generation satellite for Asia Pacific-wide connectivity



UNIQUE FEATURES

- Powerful C-band beams with optimised performance over Asia, Central Asia, Australia and Pacific Islands
- Excellent 'look angles' across footprints
- Superior satellite platform for video distribution and broadband networks
- Fleet-wide reliability with full in-orbit backup compatibility

THE SPACECRAFT

Designed/Built by	Space Systems/Loral
Model	SSL 1300
Design Life	15+ years
Nominal Orbital Location	120°E

LAUNCH

7 September 2014 by SpaceX's Falcon 9 rocket from Cape Canaveral, Florida, U.S.A.


COMMUNICATIONS PAYLOAD

C-band

No. of Transponders	28 (linearised)
Transponder Bandwidth	36 MHz
UL/DL Polarisation	Horizontal and Vertical
Coverage	Global beam Regional beam
TWTA Size	100 watts
TWTA Redundancy	32 for 28
Satellite Receiving G/T	0 dB/K max.
Receiver Redundancy	6 for 4

ASIASAT 6 120°E

C-BAND GLOBAL BEAM EIRP (dBW)

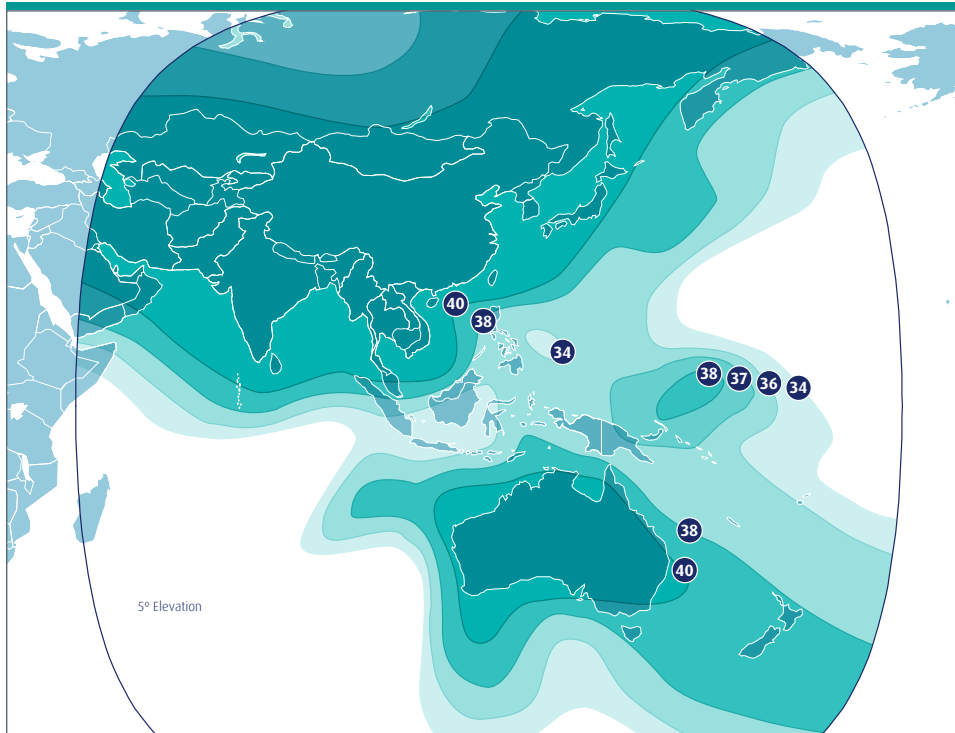

C-BAND REGIONAL BEAM EIRP (dBW)

